

# MANUAL STACKER

## GMS 1016

### SPECIAL FEATURES



Compact and light weight for easy maneuvering and effortless operation



Ideal for intermittent stacking / destacking of loads at medium heights



Foot pump provided for fatigue free operation




- **Lift capacity:** 1000 kg
- **Lift height:** 1600 mm
- **Adjustable forks:** Varying from 280 mm to 650 mm fork span, make the stacker flexible in handling variety of pallet sizes
- **Fatigue - free lifting:** Load can be lifted easily with hand operated and foot operated lift pump, thus reducing operator fatigue

## TECHNICAL SPECIFICATIONS

MODEL		GMS 1016
Load Capacity	kg	1000
Load Center	mm	450
Fork Length	mm	900
Fork Width	mm	120
Outside Fork Spread	mm	280-650
Inside Fork Spread	mm	0-400
Maximum Fork Height	mm	1600
Minimum Fork Height	mm	95
Lift Height Per Stroke	mm	10
Ground Clearance	mm	35
Overall/ Closed Mast Height	mm	1970
Overall Length	mm	1480
Overall Width	mm	730
Load Wheel (Diameter x Width)	mm	70x60
Steering Wheel (Diameter x Width)	mm	190x50
Load Wheel Type		Single/Nylon
Drive Wheel Type		Nylon
Net Weight	kg	Single/178
Color		Red

Note: All dimensions and specification indicated above are subject to a variation of  $\pm 15\%$  without notice.

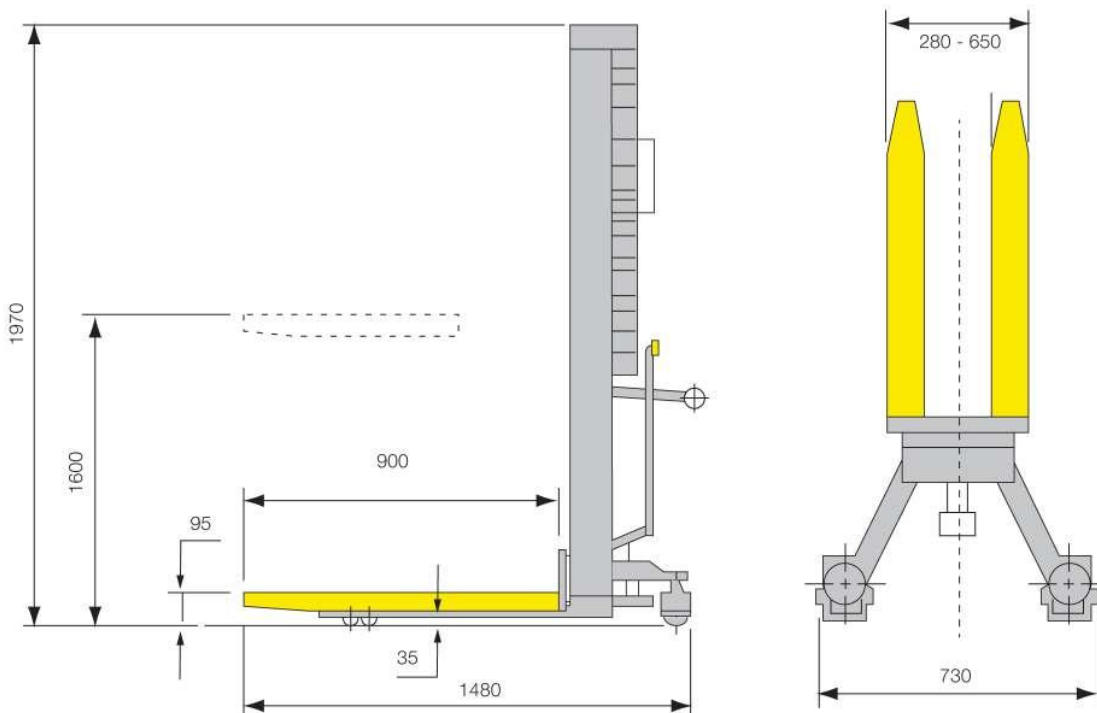

To Know More

**MASCOT**<sup>®</sup>  
CNC Tools & Equipments Pvt. Ltd.

16/28, Vijay Plot, Khodiyar Chowk, Bhaktinagar Industrial Area,  
Rajkot-360002. (Gujarat). India. Mobile : 97370 44233  
Email : [admin.mhe@mascotttools.in](mailto:admin.mhe@mascotttools.in) Web : [www.mascotttools.in](http://www.mascotttools.in)